



60
kN



FORGED STEEL IN
MY BODY



DOUBLE
ROLLER/TAPPER
BEARING



HYDRAULIC INPUTS
FROM OPPOSITE
SIDES

-50
kN



80 Ø35
mm



1/2"
BSP



250
bar



1/2"
BSP



250
bar



300
bar

30
kN

-25
kN

1850
nm

47
kg

25
l/min

Hydraulic rotator FHR 6FD2 is ideal for professional use in forestry, agriculture, road and building construction, recycling industry, general cargo and material handling.



Rotator's upper mount is applied in FORK form factor of the knuckle joint. Robust and tough built to withstand even overloads. The fork width (between fork ends) is common standard width 80mm and the knuckle pin diameter 35mm.



FHL 02

Rotator lower mount is applied in FLANGE form factor to mount direct on grapple / tool surface by fixing with screws






Ø173
17(x6)
mm



1/2"
BSP



1/2"
BSP

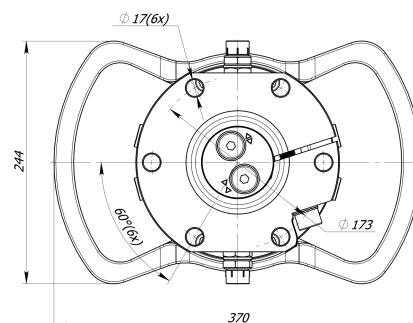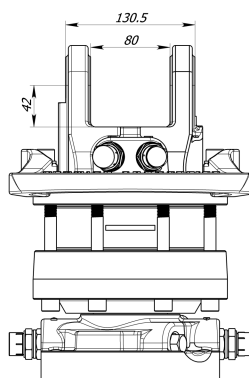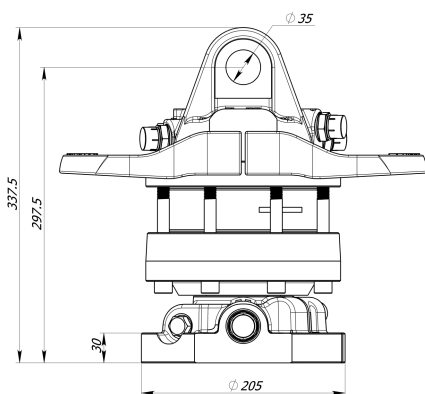

For additional information relating to price levels and technical data, please contact sales@formiko.lv

Formiko Hydraulics Ltd

Dzirceima Str. 119 k-1,
Rīga LV1055 LATVIA

+371 294 49 552

+371 264 59 383

sales@formiko.lv

www.formiko.lv

On request by special conditions there are metric nipples available for rotator FHR 6FD2



FORESTRY



GENERAL CARGO



AGRICULTURE



CONSTRUCTION



RECYCLING





Hydraulic rotator FHR 6FD2 is ideal for professional use in forestry, agriculture, road and building construction, recycling industry, general cargo and material handling.



Rotator's upper mount is applied in FORK form factor of the knuckle joint. Robust and tough built to withstand even overloads. The fork width (between fork ends) is common standard width 80mm and the knuckle pin diameter 35mm.



Rotator lower mount is applied in FLANGE form factor to mount direct on grapple / tool surface by fixing with screws



Rotator FHR 6FD2 based on reliable vane type hydraulic motor which delivers torque up to 1850Nm at 25MPa.



Formiko Hydraulics rotator FHR 6FD2 is equipped with double bearings to withstand both tensional and pushing loads.



FHR 6FD2 is designed with opposite hydraulic channels, to ease the hose replacement in case of rupture.



Some parts in rotator are built from shock resistant and deformation resistant forged steel.



Formiko rotator FHR 6FD2 is compatible with FHL 02 series links.



Rotator for shipping is packed in compact solid cardboard box with dimensions 400x250x250mm.



We providing TWO year warranty for this rotator.

For additional information relating to price levels and technical data, please contact sales@formiko.lv

Formiko Hydraulics Ltd

Dzirčiema Str. 119 k-1,
Rīga LV1055 LATVIA

+371 294 49 552

+371 264 59 383

sales@formiko.lv

www.formiko.lv

On request by special conditions there are metric nipples
available for rotator FHR 6FD2



FORESTRY



GENERAL CARGO



AGRICULTURE



CONSTRUCTION



RECYCLING

