

TECHNICAL FEATURES AND OPTIONS



Working Temperature
-30 °C / +110 °C



Material
GGG 40



Operating Pressure
Up to 310 Bar




Available Threads
BSP




Available Sizes
From 25cc to 40cc



Sealing Description
Nitrile NBR

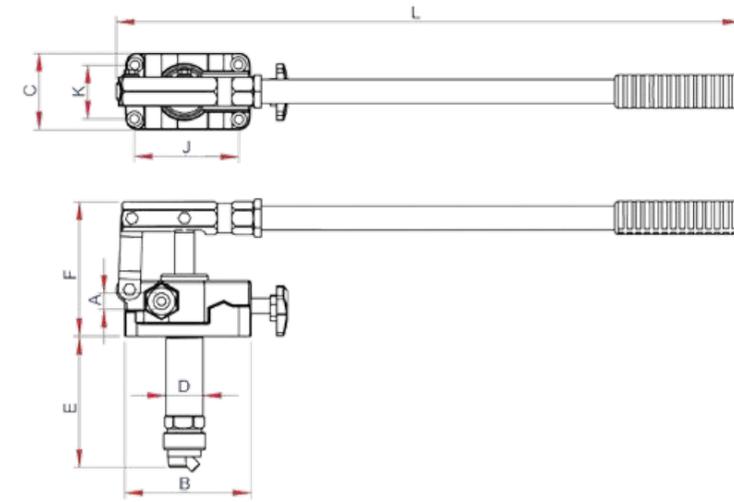

BENEFITS

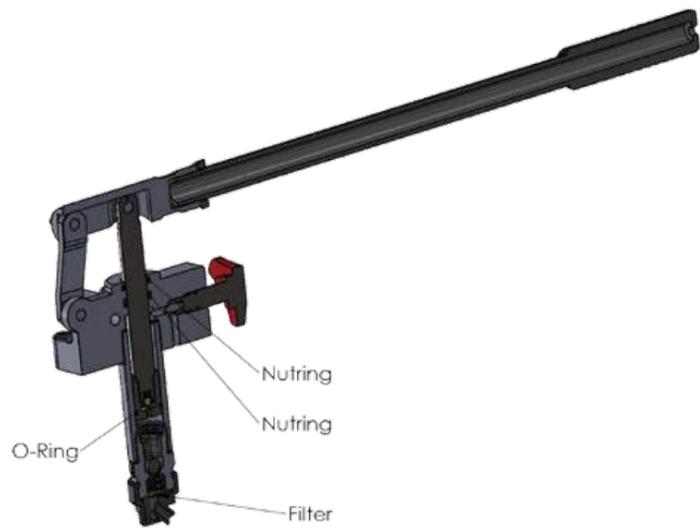

- Double acting hand pumps suitable to operate single acting applications. They can be fitted also into tank and are equipped with tapered lowering valve and with built-in adjustable relief valve.
- These hand pumps can have 2 different sizes to perform various applications and to achieve smoother loads on the lever.
- They are available with nodular cast-iron body zinc plating+sealed and nickel-plated spool.
- Simple to use.

HOW TO USE

- Before to connect, clean the surfaces and use.
- After the connect, check the leakproofing.


Product Code	Product Name	Working Volume	Port A	B		C		D		E		F		J		K		L		WEIGHT		Operating Pressure	
				mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	MPa	psi
OHP-501	Single Action	25 cc	3/8"	116	4.57	70	2.76	34	1.34	120	4.72	160	6.3	95	3.74	50	1.97	600	23.6	4.1	9.04	31	4496

Product Code	Product Name	Working Volume	Port A	B		C		D		E		F		J		K		L		WEIGHT		Operating Pressure	
				mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	MPa	psi
OHP-601	Single Action	45 cc	3/8"	116	4.57	70	2.76	34	1.34	120	4.72	160	6.3	95	3.74	50	1.97	600	23.6	4.1	9.04	31	4496


TECHNICAL FEATURES AND OPTIONS



- 
Working Temperature
 -30 °C / +110 °C
- 
Material
 GGG 40
- 
Operating Pressure
 Up to 310 Bar
- 
Available Threads
 BSP
- 
Available Sizes
 From 25cc to 45cc
- 
Sealing Description
 Nitrile NBR

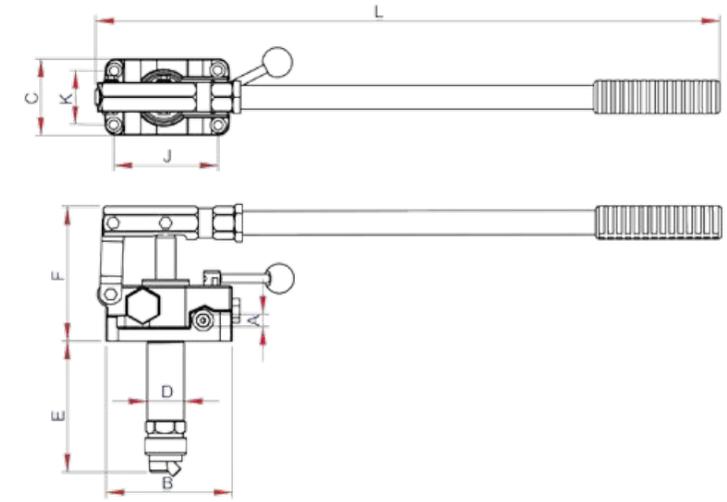

BENEFITS

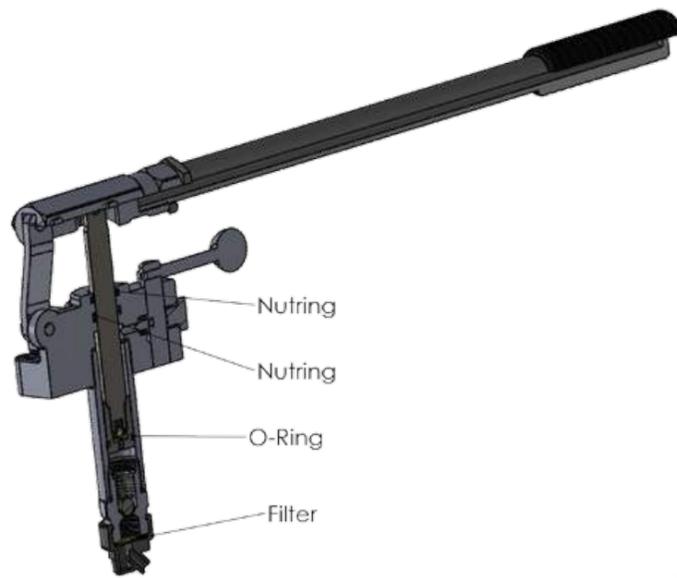

- Double acting hand pumps suitable to operate single acting applications. They can be fitted also into tank and are equipped with built-in directional control valve.
- These hand pumps can have 2 different sizes to perform various applications and to achieve smoother loads on the lever.
- They are available with nodular cast-iron body zinc plating+sealed and nickel-plated spool.
- Simple to use.

HOW TO USE

- Before to connect, clean the surfaces and use.
- After the connect, check the leakproofing.

Product Code	Product Name	Working Volume	Port A	B		C		D		E		F		J		K		L		WEIGHT		Operating Pressure	
				mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	MPa	psi
OHP-502	Double Action	25 cc	1/4"	116	4.57	70	2.76	34	1.34	120	4.72	160	6.3	95	3.74	50	1.97	600	23.6	4.1	9.04	31	4496

Product Code	Product Name	Working Volume	Port A	B		C		D		E		F		J		K		L		WEIGHT		Operating Pressure	
				mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	MPa	psi
OHP-602	Double Action	45 cc	1/4"	116	4.57	70	2.76	34	1.34	120	4.72	160	6.3	95	3.74	50	1.97	600	23.6	4.1	9.04	31	4496