

# STR & MPA - MPM series

Flow rate up to 875 l/min



# STR & MPA-MPM GENERAL INFORMATION

## Description

## Technical data

### Suction filters

**Flow rate up to 875 l/min**

#### STR

STR is a range of suction strainers for protection of the downstream pump against the coarse contamination. They are placed below the oil level directly connected to the suction line of the pump.

#### Available features:

- Female threaded connections up to 3", for a maximum flow rate of 875 l/min
- Bypass valve, to relieve excessive pressure drop across the filter media

#### Common application:

- Mobile machines (Construction and Agriculture machines)
- Industrial equipment

#### MPA - MPM

MPA and MPM are ranges of suction strainers for protection of the downstream pump against the coarse contamination. They are placed below the minimum oil level, directly connected to the suction line of the pump. The robust design allows the use of these filters in any heavy duty application.

#### Available features:

- Female threaded connections up to 3", for a maximum flow rate of 875 l/min
- Magnetic column (MPM), to hold the ferrous particles

#### Common application:

Industrial equipment

#### STR materials

- 1 - Connection: Polyamide, GF reinforced
- 2 - Core tube: Tinned Steel
- 3 - Wire mesh
- 4 - End cap: Polyamide, GF reinforced
- 5 - Bypass valve: Polyamide, GF reinforced - Steel

#### MPA - MPM materials

- 1 - Connection: Aluminium
- 2 - Magnetic column
- 3 - Tie rod: Galvanized Steel
- 4 - End cap: Galvanized Steel
- 5 - Core tube: Galvanized Steel
- 6 - Filter media: Wire mesh
- 7 - Bottom: Galvanized Steel
- 8 - Washer: Galvanized Steel
- 9 - Self-locking nut: Galvanized Steel - Nylon

#### Bypass valve

Opening pressure 30 kPa (0.3 bar)

#### Elements

Fluid flow through the filter element from OUT to IN.




#### Temperature




From -25 °C to +110 °C

## Weights [kg]

Filter series	
STR	see page 35
MPA - MPM	see page 37

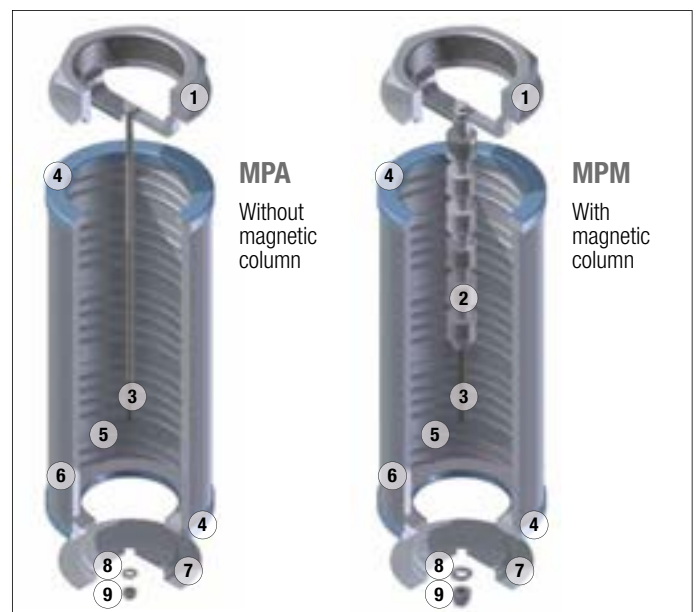

Filters pressure drop  $\Delta p$   
in function of connection type

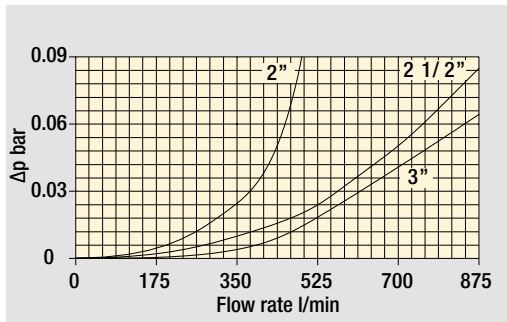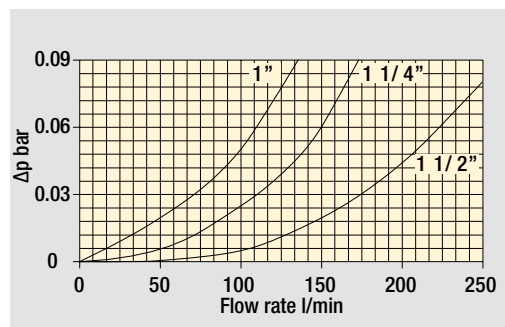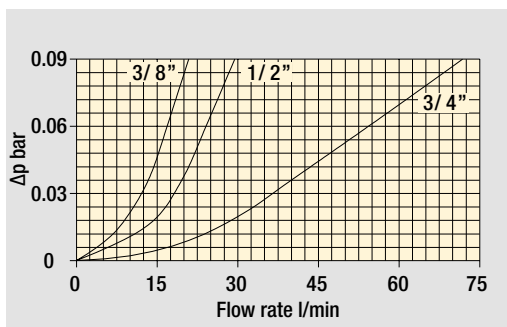

The curves are plotted using mineral oil with density of  $0.86 \text{ kg/dm}^3$  in compliance with ISO 3968.  
 $\Delta p$  varies proportionally with density.

### Flow rates [l/min]

Filter series	Thread	l/min
<b>STR &amp; MPA - MPM</b>	3/8"	19
	1/2"	28
	3/4"	67
	1"	126
	1 1/4"	167
	1 1/2"	258
	2"	480
	2 1/2"	854
	3"	995

### Hydraulic symbols

Filter series	Style S	Style B
<b>STR</b>	•	•
<b>MPA - MPM</b>	•	

### Maximum flow rate for a complete suction filter with a pressure drop $\Delta p = 0.08 \text{ bar}$ .

The reference fluid has a kinematic viscosity of  $30 \text{ mm}^2/\text{s}$  (cSt)  
and a density of  $0.86 \text{ kg/dm}^3$ .

For different pressure drop or fluid viscosity we recommend to use  
our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

Please, contact our Sales Department for further additional information.

### COMPLETE FILTER

#### Element series and size

<b>STR045</b>
<b>STR050</b>
<b>STR065</b>
<b>STR070</b>
<b>STR086</b>
<b>STR100</b>
<b>STR140</b>
<b>STR150</b>

Configuration example 1: 

STR045	1	B	G1	M60	P01
--------	---	---	----	-----	-----

Configuration example 2: 

STR100	4	S	G2	M250	P01
--------	---	---	----	------	-----

#### Connection type

	STR045	STR050	STR065	STR070	STR086	STR100	STR140	STR150
<b>1</b>	3/8"	3/8"	1/2"	1/2"	1 1/2"	1 1/4"	1 1/2"	2"
<b>2</b>	1/2"	1/2"	3/4"	3/4"	2"	1 1/4"	2"	2 1/2"
<b>3</b>	-	-	3/4"	3/4"	1 1/2"	1 1/2"	2"	3"
<b>4</b>	-	-	1"	1"	2"	2"	2 1/2"	-
<b>5</b>	-	-	-	-	1 1/2"	1 1/2"	3"	-
<b>6</b>	-	-	-	1/2"	2"	-	3"	-

#### Valves

<b>S</b>	Without bypass
<b>B</b>	With bypass 0.3 bar

#### Thread type

<b>G1</b>	Thread GAS
<b>G2</b>	Thread NPT

#### Filtration rating (filter media)

<b>M25</b>	Wire mesh	25 µm
<b>M60</b>	Wire mesh	60 µm
<b>M90</b>	Wire mesh	90 µm
<b>M250</b>	Wire mesh	250 µm


### OTHER INFORMATION

#### Conditions of packaging

Filter size	Pcs. per box
<b>045</b>	12
<b>050</b>	12
<b>065</b>	6
<b>070</b>	6
<b>086</b>	6
<b>100</b>	6
<b>140</b>	1
<b>150</b>	1

#### Execution

<b>P01</b>	MP Filtri standard
<b>Pxx</b>	Customized

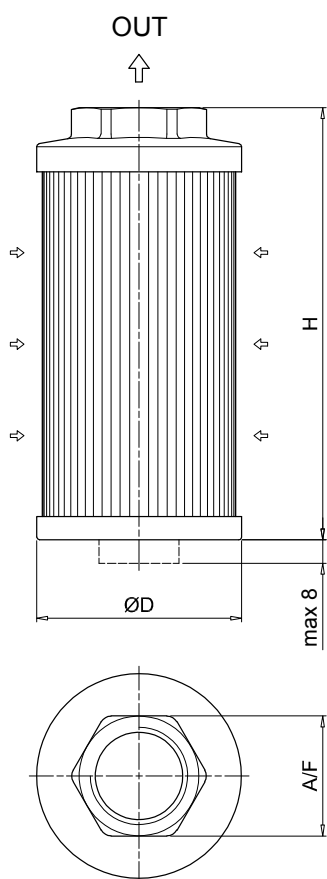

STR						
Filter size	Connection type	Thread	ØD [mm]	H [mm]	A / F [mm]	Weight [kg]
<b>045</b>	1	3/8"	46	105	30	0.15
	2	1/2"	46	105	30	0.19
<b>050</b>	1	3/8"	52	79	30	0.11
	2	1/2"	52	79	30	0.11
<b>065</b>	1	1/2"	65	110	41	0.19
	2	3/4"	65	110	41	0.22
	3	3/4"	65	144	41	0.24
	4	1"	65	144	41	0.22
<b>070</b>	1	1/2"	70	95	41	0.18
	2	3/4"	70	95	41	0.17
	3	3/4"	70	141	41	0.23
	4	1"	70	141	41	0.22
	6	1/2"	70	141	41	0.24
<b>086</b>	1	1 1/2"	86	143	69	0.33
	2	2"	86	143	69	0.30
	3	1 1/2"	86	201	69	0.43
	4	2"	86	201	69	0.40
	5	1 1/2"	86	261	69	0.53
	6	2"	86	261	69	0.50
<b>100</b>	1	1 1/4"	99	137	69	0.47
	2	1 1/4"	99	227	69	0.58
	3	1 1/2"	99	227	69	0.55
	4	2"	99	227	69	0.51
	5	1 1/2"	99	137	69	0.43
<b>140</b>	1	1 1/2"	130	160	69	0.70
	2	2"	130	160	69	0.68
	3	2"	130	262	69	0.94
	4	2 1/2"	130	272	101	1.10
	5	3"	130	272	101	1.00
	6	3"	130	330	101	1.17
<b>150</b>	1	2"	150	150	70	0.34
	2	2 1/2"	150	212	90	0.37
	3	3"	150	272	100	0.40